## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Ceiling Light

Supplier's address: Zhongshan Zhaoliang Lighting Co., Ltd., 7/F, No. 30 Qingji Street, Tiebian Vil-

lage, Henglan Town, Zhongshan City, China

Model identifier: 30868504

| Type | of lig | ht so | urce: |
|------|--------|-------|-------|
|------|--------|-------|-------|


| Lighting technology used:     | LED          | Non-directional or directional: | NDLS |
|-------------------------------|--------------|---------------------------------|------|
| Light source cap-type         | Connec-      |                                 |      |
| (or other electric interface) | tion by wire |                                 |      |
| Mains or non-mains:           | MLS          | Connected light source (CLS):   | No   |
| Colour-tuneable light source: | No           | Envelope:                       | -    |
| High luminance light source:  | No           |                                 |      |
| Anti-glare shield:            | No           | Dimmable:                       | No   |

| Product parameters  |  |                           |  |              |  |
|---|--|---------------------------|--|--------------|--|
| Parameter   |  | Value                     | Parameter  | Value        |  |
| General product parameters:   |  |                           |  |              |  |
| <u> </u>  | mption in on-<br>00 h), rounded<br>st integer                                    | 30                        | Energy efficiency class  | Е            |  |
| dicating if it refe<br>a sphere (360º)  | s flux (фuse), in-<br>ers to the flux in<br>, in a wide cone<br>arrow cone (90º) | 3 375 in<br>Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 6 500        |  |
| On-mode pow<br>pressed in W   | ver (P <sub>on</sub> ), ex-  | 30,0                      | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,00         |  |
| Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal |  | -                         | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 80           |  |
| Outer dimen-  | Height   | 400                       | Spectral power dis-  | See image    |  |
| sions without   | Width  | 205                       | tribution in the   | in last page |  |
| separate con-<br>trol gear, light-  | Depth  | 55                        | range 250 nm to 800<br>nm, at full-load  |              |  |

| ing control parts and non-lighting control parts, if any (millimetre) |   |      |  |                |  |
|---|---|------|--|----------------|--|
| Claim of equivalent power <sup>(a)</sup>                              |   | -    | If yes, equivalent power (W)           | -              |  |
|   |   |      | Chromaticity coordinates (x and y)     | 0,313<br>0,337 |  |
| Parameters for LED and OLED light sources:                            |   |      |  |                |  |
| R9 colour rendering index value                                       |   | 1    | Survival factor                        | 0,90           |  |
| the lumen maintenance factor  |   | 0,96 |  |                |  |
| Parameters for LED and OLED mains light sources:                      |   |      |  |                |  |
| displacement fa   | ctor (cos φ1)   | 1,00 | Colour consistency in McAdam ellipses  | 6              |  |
| replaces a flu  | ED light source norescent light integrated balar wattage. | _(b) | If yes then replace-<br>ment claim (W) | -              |  |
| Flicker metric (P   | st LM)  | 1,0  | Stroboscopic effect metric (SVM)       | 0,9            |  |

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

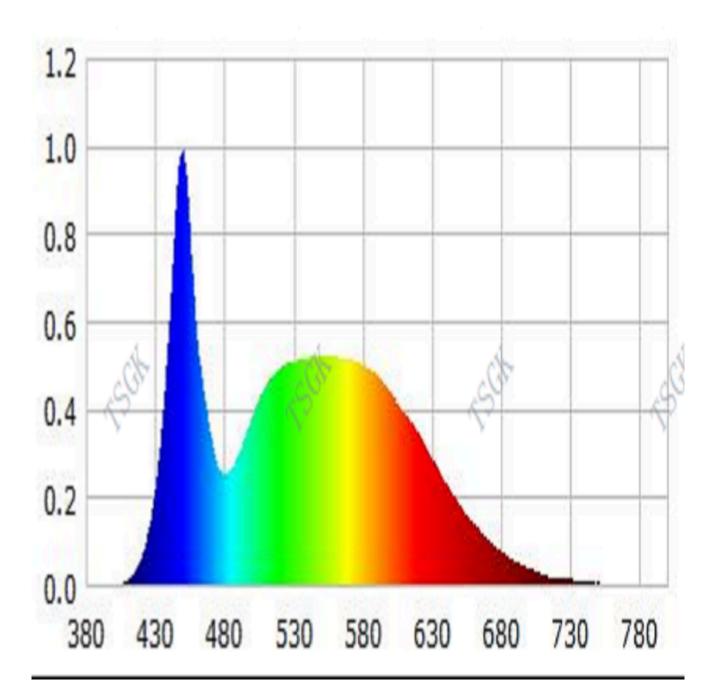

Model placed on the Union market from 01/06/2023



**EPREL registration number:** 1611306 https://eprel.ec.europa.eu/qr/16

11306

Supplier: StoneX Trading (Authorised representative) Website: https://goecolighting.fr/

**Customer care service:** 

Name: Zhongshan Zhaoliang Lighting Co., Ltd. Website:

Email: goecolightingfr@163.com Phone: +447845991423

Address:

7/F, No. 30 Qingji Street, Tiebian Village, Henglan Town, Zhongshan

City, China